

## Swing-Loader type 27200



Double-Swing-Loader type 27200

Swing-Loader type 27200 mobile version

Swing-Loader type 27200

## Ergonomic lifting and tipping

### Application

The Swing-Loader type 27200 offers targeted ergonomic and safe handling of 600 l and 1000 l standard trolleys or special charging trays. It is an indispensable aid for lifting and controlled emptying of containers while ensuring high hygiene standards.

### Version

- Made entirely of stainless steel, material no. 1.4301
- Hygienic surface blasted by glass beads
- The drive of the system is electro-hydraulic and is done in controlled manner, i.e. a step-by-step discharging of the trays is possible
- Integrated hydraulic station and electric control
- CE-compliant and ready for connection


### Options

- Special controls on request
- Stationary or mobile version
- Available with table and other attachments

### Technical data

Power supply	3x400V, further options
Power consumption	1.5 kW
Main frequency	50 Hz, further options
Tipping height	Up to 2,000 mm
Tipping angle	120°
Lifting weight	>1,000 kg
Lifting speed	0.2 m/s
Unloaded weight	From 400 kg net
Protection class	IP 65/54

Technical data may be subject to changes

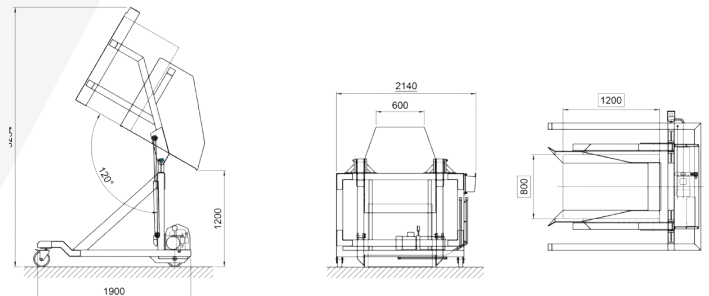

## Contact

CN: shanghai@frontmatec.com  
Phone: +86 215 859 4850

DK: kolding@frontmatec.com  
Phone: +45 763 427 00

NL: rijssen@frontmatec.com  
Phone: +31 886 294 000

UK: birmingham@frontmatec.com  
Phone: +44 121 313 3564

[frontmatec.com](http://frontmatec.com)

DE: beckum@frontmatec.com  
Phone: +49 252 185 070

ES: barcelona@frontmatec.com  
Phone: +34 932 643 800

RU: moscow@frontmatec.com  
Phone: +7 495 424 9559

US: kansascity@frontmatec.com  
Phone: +1 816 891 2440